

# TRANSITION FITTINGS

Manufactured to: UNI9736: EN1555: EN12201

75-250+mm - PN16 - SDR11- PE80/100




Quality  
ISO 9001

www.pca.net.au

## POLYETHYLENE/STEEL

Applications	Metal Options			PE Options	
	Material	Coating	Connector	Material	Colour
Gas	EN10208	None	Welded	PE80	Black
	EN10255	PE			Yellow
Water	API5L	Epoxy	Threaded	PE100	Blue
	STAINLESS STEEL	Zinc			Lilac

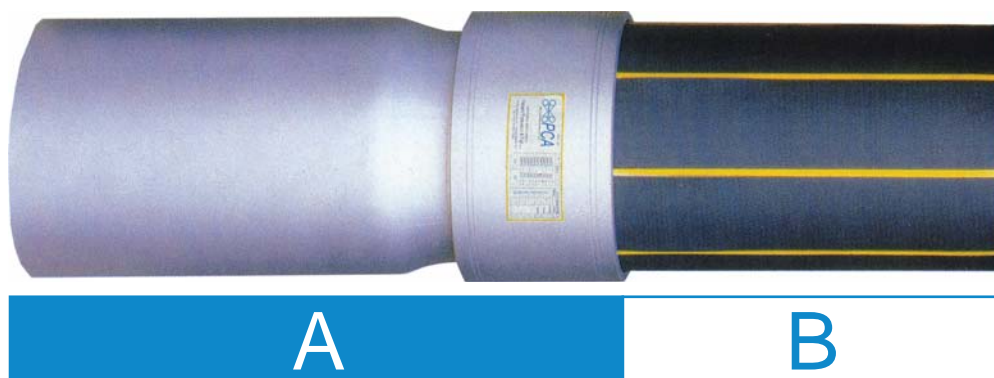

Size	Steel Dimensions			PE Dimensions AS/NZS 4130:2009		
	Diam	WT	Length (A)	Diam	SDR11	Length (B)
75	2 1/2"	3.2	300	75	6.8	200
90	3"	3.2	300	90	8.2	200
110	4"	3.6	300	110	10.0	200
125	4"	3.6	300	125	11.4	200
140	5"	5.0	300	140	12.7	250
160	6"	5.0	350	160	14.6	250
180	6"	5.0	350	180	16.4	250
200	8"	5.6	400	200	18.2	300
225	8"	5.6	400	225	20.5	300
250 +	Please call for specs and prices for fittings 250mm and above					



\*All Dimensions in mm. PCA reserves the right to change or modify item specs without notice.  
Size & configuration of fittings can be customised to suit customer applications.

sales@pca.net.au

